

The background of the entire page is a complex, repeating geometric pattern of red and white shapes. On the left side, there are several large, stylized red arrows pointing to the right, arranged in a staggered, overlapping fashion. The top and bottom edges of the page feature a series of parallel red diagonal lines, creating a striped effect. The text is overlaid on this pattern.

FLOW+ FORM

INSTALLATION AND CARE HANDBOOK

ATTENTION DEALERS: Please provide this document to HRE FlowForm customers at time of delivery and/or mounting.

WELCOME TO THE FAMILY

You are now the proud owner of a set of HRE FlowForm Wheels. You have joined a special group of automotive enthusiasts that understand the value of a distinctive and quality product.

Please read through this handbook completely as it will help ensure your HRE FlowForm wheels remain trouble free for many years to come.

If at any time you have comments or questions, please contact HRE Wheels or your local HRE Authorized Dealer.

CONTENTS

MOUNTING *page 2 - 3*

MAINTENANCE *page 4*

CENTER CAP INSTALLATION *page 4*

WARRANTY *page 5*

CONTACT *page 6*

MOUNTING *page 2*

Only mount the HRE FlowForm Wheel with the correct diameter, width, pitch circle diameter (PCD), and offset that fits your vehicle. Installing the wrong wheel on your car could result in extreme wheel failure and/or vehicle damage.

Only use specified valve stem/TPMS during installation and check air pressure regularly.


Make sure the wheels and tires are mounted and balanced properly by a trained professional.

If hub ring is provided, make sure to install it correctly as shown below.


Only install HRE FlowForm Wheels using nuts and bolts with the correct seating shape. Check BEFORE installing whether the wheel lug seat is Flat, Ball or Conical (See diagram below). If incorrect lugs are used, severe shaking may occur and/or the wheel could fall off the car.

*Refunds or Exchanges will NOT be accepted if tires have been mounted on wheels.

HUB CENTRIC RING

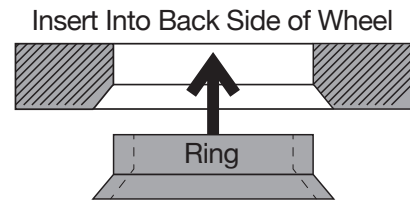


LUG SEAT TYPES

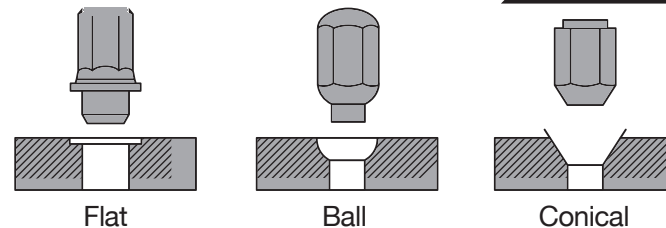


MOUNTING page 3

Always torque the lug bolts in a cross pattern according to the vehicle manufacturer's specifications.

PROPER LUG TIGHTENING: CROSS PATTERN

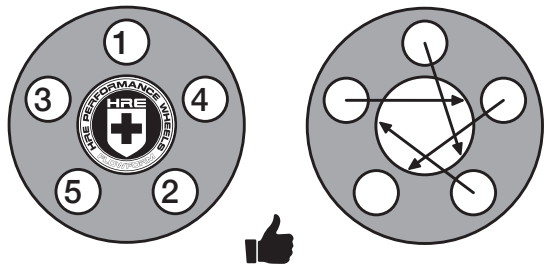

IMPROPER LUG TIGHTENING: ANY OTHER WAY

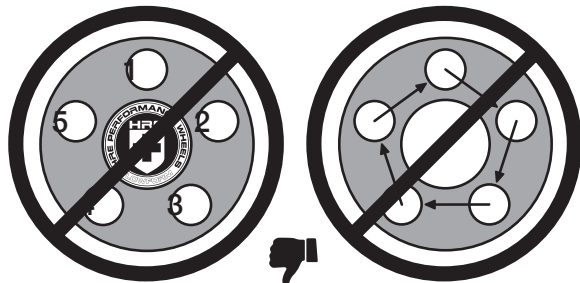

After wheels are on the car, check steering clearance. Turn the steering wheel full lock from side to side making sure the wheel/tire does not impact any part of the vehicle. If it does, contact your HRE FlowForm Wheel Dealer immediately. If you meant it to be that way and you just haven't rolled your fenders, get on it already and send us some pics!

After 50-100 miles of having your wheels on the car, recheck that your lugs are torqued to spec and that none of them are loose. If you find any issues, call (don't drive to) your HRE FlowForm Wheel Dealer before using the vehicle.

MAINTENANCE page 4

The finish on your HRE FlowForm Wheels should last for many years under normal use and care.

Wash your HRE FlowForm Wheels using mild, non-abrasive soap and water. Harsh chemicals should not be needed and are not covered under the Limited Lifetime Warranty.


Automatic car washes are handy but aren't awesome to wheels. Use the hand wash option or do it the old-fashioned way – in the driveway.

After use in sand, snow or mud wash wheels to eliminate harsh abrasives such as seawater and road salt/sand.


CENTER CAP INSTALLATION

Place the center cap so the HRE shield is centered, in-line with either the 12 or 6 o'clock lug hole. The shield should be pointing down towards the valve stem hole.

**FF01, FF15
CENTER @ 12 O'CLOCK**



**FF04, FF10, FF11
CENTER @ 6 O'CLOCK**



Your HRE FlowForm Wheels come with a Limited Lifetime Structural and 2-Year Finish Warranty for as long as the original purchaser owns the wheels. This Warranty is not transferrable to any future parties.

HRE has the sole discretion on whether a wheel meets Warranty requirements.

Structural Warranty covers normal everyday use **NOT** including:

- Vehicle impacts
- Track usage
- Jumping
- Road hazards such as potholes, curbs, logs, sink holes, sofas, roadkill or anything else that happens to be in the road
- Any wheel installed incorrectly in any way, or used on a vehicle with a higher load rating than the wheel is intended
- Shipping or transit related incidences or negligence
- Mounting your wheels with any product other than your vehicle's manufacturer or HRE supplied parts
- Any wheel that has been modified repaired or altered in any way
- Any wheel that has been finished, powder coated or painted by anyone other than HRE

Finish Warranty covers normal everyday use **NOT** including:

- Washing your wheels with things such as harsh chemicals or abrasive pads
- Road rock chips or other road hazards that may chip finish
- Extreme sun or cold
- Any wheel that has been finished, powder coated or painted by anyone other than HRE
- Mobile Finish Repair

*Refunds or Exchanges will NOT be accepted if tires have been mounted on wheels.



If you ever need anything (wheel related, that is) feel free to call us anytime, as long as it's Monday-Friday 8am to 5pm (PST)

HRE USA

PHONE: +1 844 HRE WHEELS

FAX: +1 760 598 5885

EMAIL: info@hrewheels.com

HRE JAPAN

PHONE: +81 080 4968 0308

EMAIL: japan@hrewheels.com

HRE HEADQUARTERS

2611 Commerce Way, Suite D
Vista, Ca. 92081
USA

hrewheels.com

[f/HREPerformanceWheels](https://www.facebook.com/HREPerformanceWheels)

[@/FlowFormWheels](https://www.instagram.com/FlowFormWheels)

[v/FlowForm_Wheels](https://www.youtube.com/channel/UC...)

FLOW+
FORM

THINGS
ARE ABOUT
TO GET
AWESOME